


Optospot OSP1

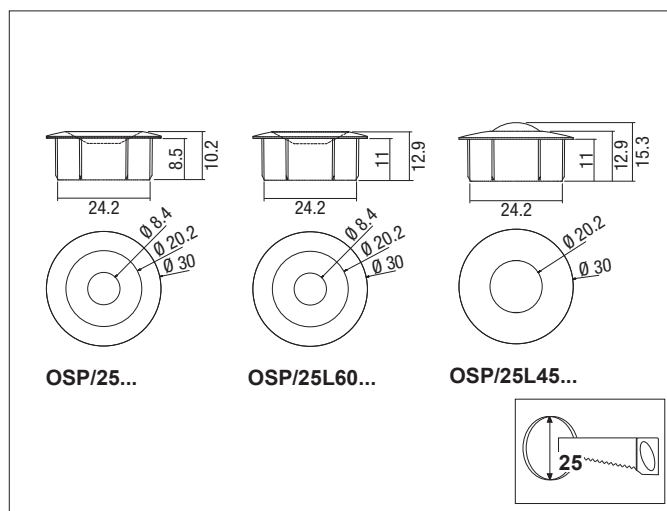

Minispot da incasso per foro \varnothing 25 mm con un LED di potenza da 1W~ a 350 mA.

Corpo plastico disponibile in colore bianco (/B), trasparente (/I) e cromato (/MT). Da utilizzarsi con alimentatori elettronici a corrente costante 350 mA.

Tre versioni: OSP/25/L1 senza lente; OSP/25L60/L1 con lente incorporata da 60° (\varnothing 8 mm); OSP/25L45/L1 con lente incorporata da 45° (\varnothing 13,7 mm).

Connessione con cavi unipolari lunghezza 25 cm.

I moduli sono caratterizzati considerando una vita media di 30.000 ore.

Attenzione: connettere esclusivamente in serie.

Minispot fitting a \varnothing 25 mm hole, equipped with high power 1W~350 mA LED.

Plastic body available in white (/B), transparent (/I) and chrome (/MT).

To be used with 350 mA constant current power supply.

Three versions: OSP/25/L1 without lens; OSP/25L60/L1 with built-in 60° lens (\varnothing 8 mm); OSP/25L45/L1 with built-in 45° lens (\varnothing 13,7 mm).

Wire connection with single pole 25 cm cables.

Modules characterization is based on average lifetime of 30.000 hours.

Warning: serial connection only.

Codice articolo Article code		n LED	mA	V max	W max	ta	K	lm		cd	LPH \downarrow mm		
OSP/25B/L1/B	<input type="checkbox"/>	1	350	3,8	1,3	45	6000	100	120	-	30x24,2x10,2	10	9,0
OSP/25B/L1/BC	<input type="checkbox"/>	1	350	3,8	1,3	45	3000	70	120	-	30x24,2x10,2	10	9,0
OSP/25I/L1/B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	120	-	30x24,2x10,2	10	9,0
OSP/25I/L1/BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	120	-	30x24,2x10,2	10	9,0
OSP/25MT/L1/B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	120	-	30x24,2x10,2	10	9,0
OSP/25MT/L1/BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	120	-	30x24,2x10,2	10	9,0
OSP25L45BL1B	<input type="checkbox"/>	1	350	3,8	1,3	45	6000	100	45	72	30x24,2x15,3	10	10,0
OSP25L45BL1BC	<input type="checkbox"/>	1	350	3,8	1,3	45	3000	70	45	51	30x24,2x15,3	10	10,0
OSP25L45IL1B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	45	72	30x24,2x15,3	10	10,0
OSP25L45IL1BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	45	51	30x24,2x15,3	10	10,0
OSP25L45MTL1B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	45	72	30x24,2x15,3	10	10,0
OSP25L45ML1BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	45	51	30x24,2x15,3	10	10,0
OSP25L60BL1B	<input type="checkbox"/>	1	350	3,8	1,3	45	6000	100	60	54	30x24,2x12,9	10	10,0
OSP25L60BL1BC	<input type="checkbox"/>	1	350	3,8	1,3	45	3000	70	60	38	30x24,2x12,9	10	10,0
OSP25L60IL1B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	60	54	30x24,2x12,9	10	10,0
OSP25L60IL1BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	60	38	30x24,2x12,9	10	10,0
OSP25L60MTL1B	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	6000	100	60	54	30x24,2x12,9	10	10,0
OSP25L60ML1BC	<input checked="" type="checkbox"/>	1	350	3,8	1,3	45	3000	70	60	38	30x24,2x12,9	10	10,0



Vedi dati fotometrici Pag. 725
See photometric data Page 725