

BCFR2

Multipower

CHP

MULTI LAMP


FREQUENT IGNITION

110°

CE



EEI = A2

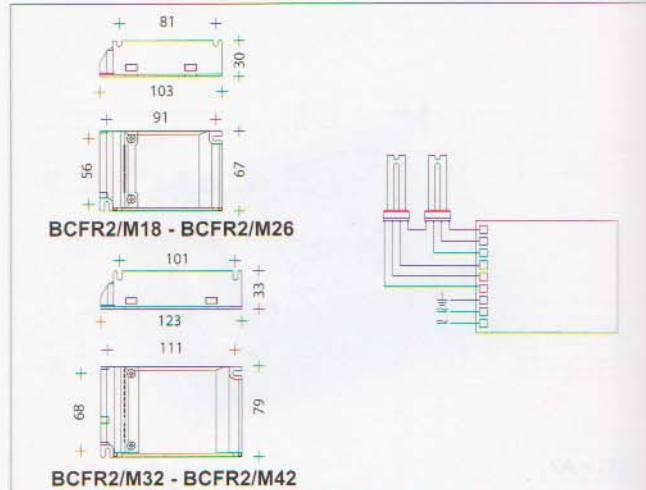

Ballast elettronico ad alta efficienza per tubi fluorescenti e compatte fluorescenti.

Auto adattante a potenze diverse.

Con morsetti a innesto rapido per cavi collegamento.

Lunghezza max cavi lampada cm 200.

Accensione con preriscaldamento dei catodi.

Assenza dell'effetto stroboscopico.

PROTEZIONI:

lampada scollegata, catodi interrotti, fine vita lampada e effetto rettificante.

Norme di riferimento:

Sicurezza: EN 61347-1; EN 61347-2-3

Radio disturbi: EN 55015

Armoniche: EN 61000-3-2

Immunità: EN 61547

Prestazioni: EN 60929.

High efficiency electronic ballast for compact fluorescent tubular and compact lamps.

Self adapting to lamps with different power.

Equipped with push in terminals.

Max length lamp cables cm 200.

High efficiency. Pre-heating of the cathodes.

No flickering.

PROTECTIONS:

lamp disconnection, cathodes breaking, lamp end of life and rectifying effect.

Standard reference:

Safety: EN 61347-1; EN 61347-2-3

Radio Interferences: EN 55015

Harmonics: EN 61000-3-2

Immunity: EN 61547

Performance: EN 60929.

V	A	Hz	W Lamp	W max	λ	ta °C	tc °C	in	out	LPH ↓mm	?	g
---	---	----	--------	-------	---	-------	-------	----	-----	---------	---	---

S/BCFR2/M18	220+240	0,12+0,18	50+60	2x13+2x42	28+36	> 0,9c	-15+60	80	1,5	1,5	67x103x30	10	140
S/BCFR2/M26	220+240	0,19+0,23	50+60	2x26	50	> 0,9c	-15+60	80	1,5	1,5	67x103x30	10	140
S/BCFR2/M32	220+240	0,19+0,28	50+60	2x22+2x32	44+64	> 0,9c	-15+60	80	1,5	1,5	79x123x33	10	108,0
S/BCFR2/M42	220+240	0,15+0,50	50+60	2x18+2x42	38+90	> 0,9c	-15+50	80	1,5	1,5	79x123x33	10	206,0

LAMPAD E LAMPS

S/BCFR2/M18				
TYPE	OSRAM	PHILIPS	W	SOCKET
2xTC TEL	DULUX T/E	PL-T/4p	13	Gx24q-1
2xTC TEL	DULUX T/E	PL-T/4p	18	Gx24q-2
2xTC DEL	DULUX D/E	PL-C/4p	13	G24q-1
2xTC DEL	DULUX D/E	PL-C/4p	18	G24q-2

S/BCFR2/M26				
TYPE	OSRAM	PHILIPS	W	SOCKET
2xTC DEL	DULUX D/E	PL-T/4p	26	G24q-3
2xTC TEL	DULUX T/E	PL-T/4p	26	Gx24q-3

S/BCFR2/M32				
TYPE	OSRAM	PHILIPS	W	SOCKET
2xTC DEL	DULUX D/E	PL-T/4p	26	Gx24q-3
2xTC TEL	DULUX T/E	PL-T/4p	26	Gx24q-3
2xTC TEL	DULUX T/E	PL-C/4p	32	Gx24q-3
2xT5	FQ	TL5 HO	24	G5
2xT5-C	FC	TL5 C	22	G5
2xTC-L	DULUX L	PL-L	24	2G11
2xTC-F	DULUX F	-	24	2G10

S/BCFR2/M42				
TYPE	OSRAM	PHILIPS	W	SOCKET
2xTC DEL	DULUX D/E	PL-C/4p	26	G24q-3
2xTC TEL	DULUX T/E	PL-T/4p	26	Gx24q-3
2xTC TEL	DULUX T/E	PL-T/4p	32	Gx24q-3
2xTC TEL	DULUX T/E	PL-T/4p	42	Gx24q-4
2xTC-L	DULUX L	PL-L	18	2G11
2xTC-L	DULUX L	PL-L	24	2G11
2xTC-L	DULUX L	PL-L	36	2G11
2xTC-L	DULUX L	PL-L	40	2G11
2xTC-F	DULUX F	-	18	2G10
2xTC-F	DULUX F	-	24	2G10
2xTC-F	DULUX F	-	36	2G10
2xT5	FQ	TL5 HO	24	G5
2xT5	FQ	TL5 HO	39	G5
2xT8	L	TL-D	18	G13
2xT8	L	TL-D	36	G13
2xT5-C	FC	TL5 C	22	2Gx13
2xT5-C	FC	TL5 C	40	2Gx13
2xTR	L..C	TL-E	22	G10q
2xTR	L..C	TL-E	32	G10q
2xTR	L..C	TL-E	40	G10q

Ballast Multipower per compatte - Multipower ballast for compact lamps